


CYLINDER HEAD TEMPERATURE/CYLINDER HEAD TEMPERATURE

Illustration of Instrument Connection:

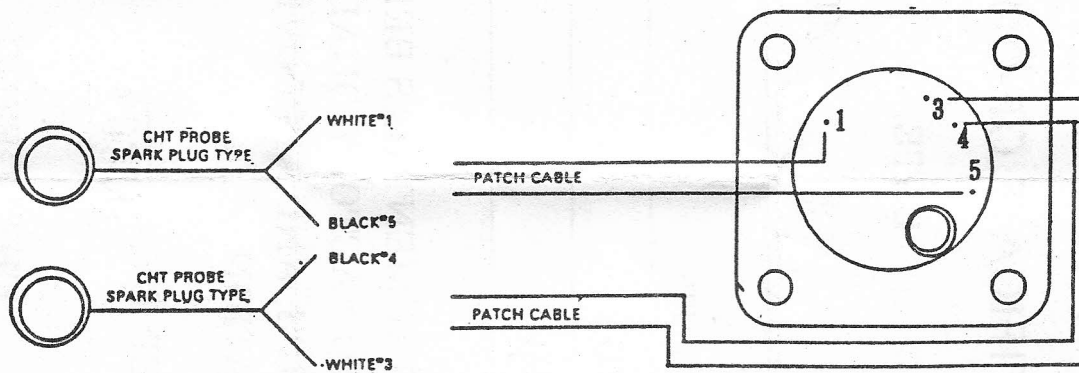

NOTE:

- 1) When installing the instrument from behind the panel, use a $2\frac{1}{16}$ " hole. When installing the unit from in front of the panel, use a $2\frac{1}{8}$ " hole. Use 4-"40 screws to hold instrument secure.
- 2) Mount at least 12" away from compass.
- 3) This unit has not been approved for type certified aircraft.
- 4) Do not connect instrument to any other power source, damage may occur.
- 5) If no reading, reverse connections.